


TAPON ALLEN HEXÁGONO INTERIOR CONICIDAD 3/4 | CALIDAD 12.9 MÉTRICO

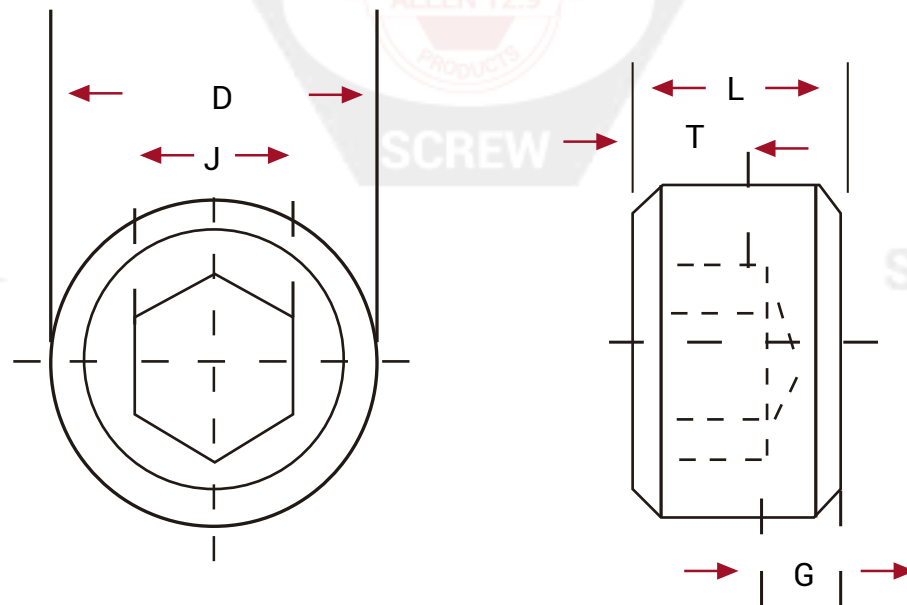

Dimensiones (inch)

| Nom Size | D Nominal O.D | Threada por inch | J. Hexagon Socket Size Nominal | Y. Key Engagement Minimum | G. Wall Thicionesa Minimum | L. Overall Langht | | | Tightening Torque (inch-Lba) |
|----------|---------------|------------------|--------------------------------|---------------------------|----------------------------|-------------------|---------|---------|------------------------------|
| | | | | | | Nominal | Maximum | Minimum | |
| 1/15 | -312 | 27 | 5/32 | -140 | -052 | 5/16 | -324 | -300 | 150 |
| 1/8 | -405 | 27 | 8/16 | -140 | -052 | 5/16 | -324 | -300 | 250 |
| 1/4 | -540 | 18 | 1/4 | -218 | -073 | 7/16 | -457 | -417 | 500 |
| 3/8 | -675 | 18 | 5/16 | -250 | -054 | 1/2 | -520 | -480 | 1200 |
| 1/2 | -640 | 14 | 3/8 | -312 | -095 | 9/16 | -583 | -642 | 1800 |
| 3/4 | 1.060 | 14 | 9/16 | -312 | -125 | 5/8 | -645 | -605 | 3000 |
| 1 | 1.315 | 11-1/2 | 5/8 | -375 | -125 | 3/4 | -770 | -730 | 4200 |
| 1-1/4 | 1.650 | 11-1/2 | 3/4 | -437 | -125 | 13/16 | -832 | -792 | 5400 |
| 1-1/2 | 1.900 | 11-1/2 | 1 | -437 | -156 | 13/16 | -843 | -780 | 6300 |
| 2 | 2.375 | 11-1/2 | 1 | -437 | -158 | 7/8 | -906 | -844 | 8500 |